

Wrapping machine for chocolate products in double twist.  
A special version of the machine for fringed wrapping style  
is also available.

EU7



Double Twist  
Protected Twist



Fringed Wrapping Style

**Products**


- Deposited Chocolate Products
- Enrobed Chocolate Products  
(wafers, biscuits, cereals)

**Output**

- up to 400 products/min  
Double Twist without photo-electric  
print registration
- up to 350 products/min  
Double Twist with photo-electric  
print registration
- up to 280 products/min  
Fringed Wrapping Style
- up to 270 products/min  
Protected Twist

**Product dimensions**

	Length: 18–60 mm Fringed Wrapping Style: Length: 18–30 mm  Width: 13–29 mm Height: 8–25 mm
	Ø: 13–25 mm Height: 8–25 mm

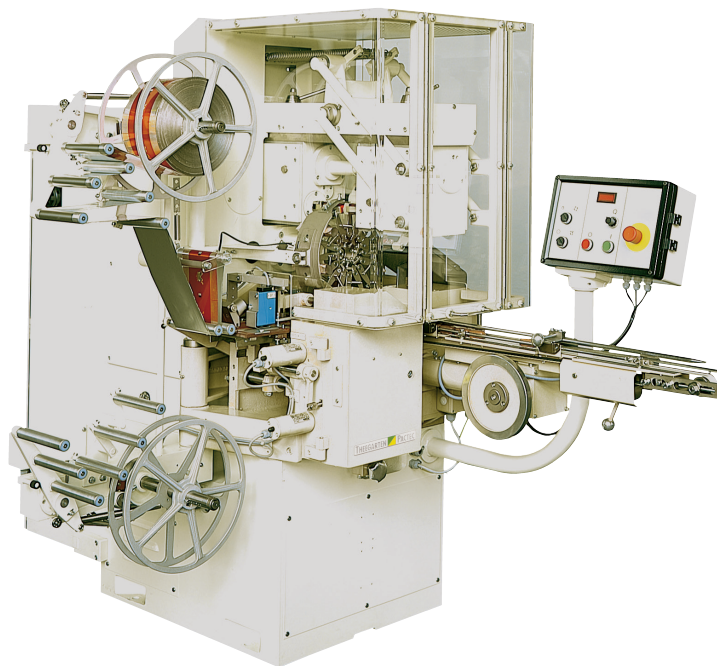

# EU7

## Wrapping material

- All common wrapping materials can be used

## Material dimensions

- Reel diameter: up to 350 mm
- Reel width: up to 140 mm
- Core diameter: 40–70 mm

## Utilities

- Connected load: 2,5 kVA
- Compressed air consumption: 0,5 m<sup>3</sup>/h; 600 kPa for Protected Twist

## Measurements


- Length: 2190 mm
- Width: 1420 mm
- Height: 1600 mm

## Weight

- 1070 kg

## Combination

Beside manual feeding, the machine can be directly synchronized to the production line by means of a Theegarten-Pactec belt feeding or robotic pick and place system.

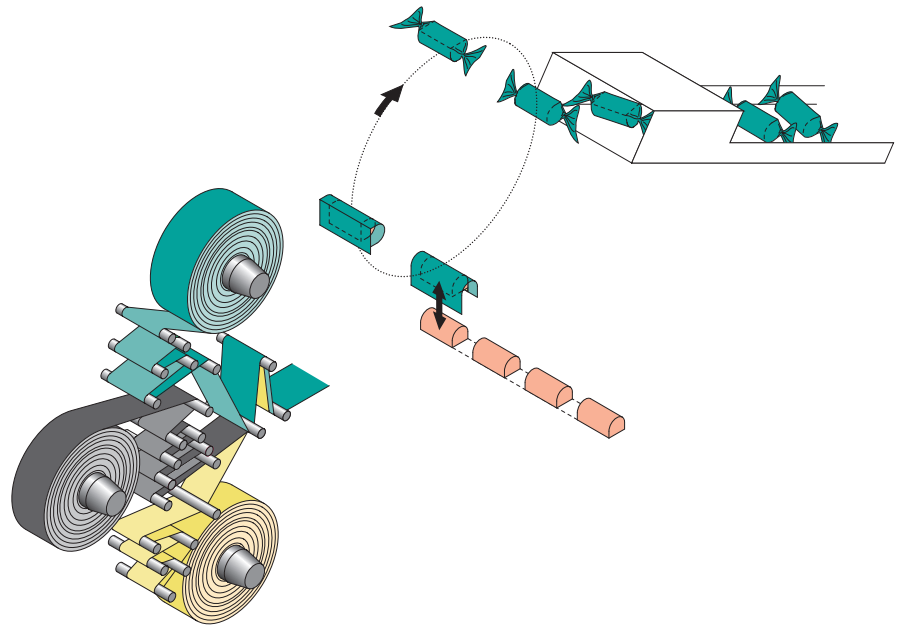

## Special features

- PLC control
- Quick size change by exchange of a few size parts only
- Saving of wrapping material by “no product – no paper” -device
- Infinitely variable adjustment of the twist gripper oscillation depending on the wrapping material quality
- Excellent accessibility for operation, maintenance and cleaning purposes
- Due to the automatic operation, several machines can be handled by one operator

## Options

- Photo-electric print registration
- Additional reel holder when using a third wrapping material
- Special versions for “fringed” wrapping styles
- Optional device for hermetically sealed, airtight packages (“Protected Twist”)